


FQC

系列防水防尘防腐电磁起动器



型号含义 Model implication

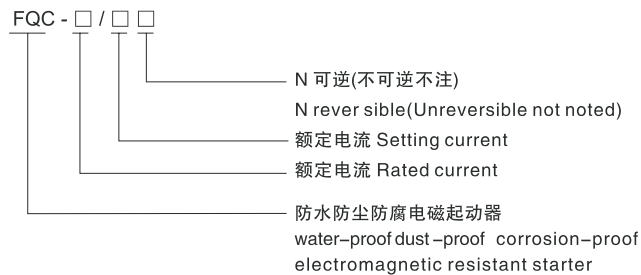

产品特点 Features

- 壳体采用玻璃纤维增强不饱和聚酯树脂模压而成或采用不锈钢成型;
- 本产品抗强酸、强碱、盐腐蚀,防腐等级WF2,防护等级为IP65;
- 所有外露紧固件均采用不锈钢,密封采用硅橡胶,耐油、耐酸、耐碱、耐高温、抗老化;
- 内装交流接触器、热断电器、自复位万能转换开关或按钮等;
- 可控制交流50Hz,380V三相异步电动机的起动停止,并具有过载和断相及失压保护;
- 钢管或电缆布线均可;
- The casing adopts glass fiber reinforced unsaturated polyester resin molded or stainless steel molding.
- The products can withstand the corrosion of strong acid, strong alkali, salt, ammonia, chlorine, anti-corrosion F2, protection grade reaches IP65.
- All the leakage fixers adopt stainless steel, sealers adopt silicon rubber, they can withstand oil, acid alkalis, high temperature.
- Inside is installed AC contactor, thermal relay, self-settable conversion switch.
- Able to directly control 50Hz 380V asynchronous motor with the protection of overload, phase-failure and voltage-absent.
- Conduit wiring or cable wiring.

使用环境 Environment conditions

- 环境温度-25℃至+55℃;
- 安装高度不超过海拔2000m;
- 适用于强酸、强碱、盐、氨、氯离子腐蚀;多水、多尘、潮湿等环境;
- 广泛应用于石油、化工、码头、食品、制药、军工等工业企业。
- Ambient temperature is -25℃ to +55℃.
- The height of installment can't over 2000 meters above sea level.
- They can withstand the corrosion of strong acid, strong alkali, salt, ammonia, chlorine, and the environment of more water, more dust and humidity.

FQC

Type water-proof dust-proof corrosion-proof electromagnetic resistant starter

■ They are widely used in the lines of petroleum, chemistry, dock, food, medicine, war industry and so on. Wiring and tubing.


技术参数 Technical parameters

产品型号 Type	额定电 流(A) Rated current	热继电器整定电 流调节范围(A) Setting current of thermal relay	控制电动机 最大功率(kw) Max power of controlled motor	引入口进 规格(G') Inlet spec.	电缆规格 (Φ,mm) Cable's spec.	防护等级 Protectioin grade
FQC-9/□	9	7~10	4及以下	1	11~18	IP65
FQC-12/□	12	9~13	5.5			
FQC-18/□	18	12~18	7.5			
FQC-25/□	25	17~25	11			
FQC-32/□	32	23~32	15	1 1/4	14~25	
FQC-40/□	40	30~40	18.5			
FQC-50/□	50	37~50	22			
FQC-65/□	65	48~65	30	1 1/2	17~28	
FQC-80/□	80	63~80	37			
FQC-95/□	95	80~93	45			
FQC-9/□N	9	7~10	4及以下	1	11~18	
FQC-12/□N	12	9~13	5.5			
FQC-18/□N	18	12~18	7.5			
FQC-25/□N	25	17~25	11	1 1/4	14~25	
FQC-32/□N	32	23~32	15			
FQC-40/□N	40	30~40	18.5			


注：用户型时请适当考虑电流裕度。

Note: When selecting the product please consider the current margin carefully

外形及安装举例 Outline and mounting example



FQC-□/□



FQC-□/□N

FQC

系列防水防尘防腐电磁起动器

